


FOOD & BEVERAGE

INDUSTRIAL

COMMERCIAL

INSTITUTIONAL

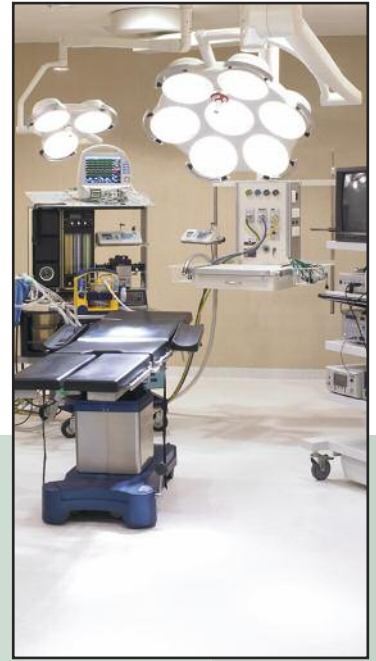


Dur-A-Flex, Inc. is a manufacturer of industrial and commercial floor & wall systems with 50 years of recognition in many industries such as food & beverage, pharmaceutical, healthcare, retail, general industrial among others.

Dur-A-Flex is committed to customer satisfaction through quality and continuous improvement initiatives. Therefore, we invest in:

- Foodservice
- Supermarkets/Retail
- Healthcare
- Education
- Manufacturing
- Pharmaceutical
- Hospitality

- research and development of new technologies
- quality management systems
- compliance with relevant regulatory standards
- training programs for our network of installers (pictured on right)
- technical assistance for the installation of our flooring systems

# SEAMLESS FLOOR & WALL SYSTEMS

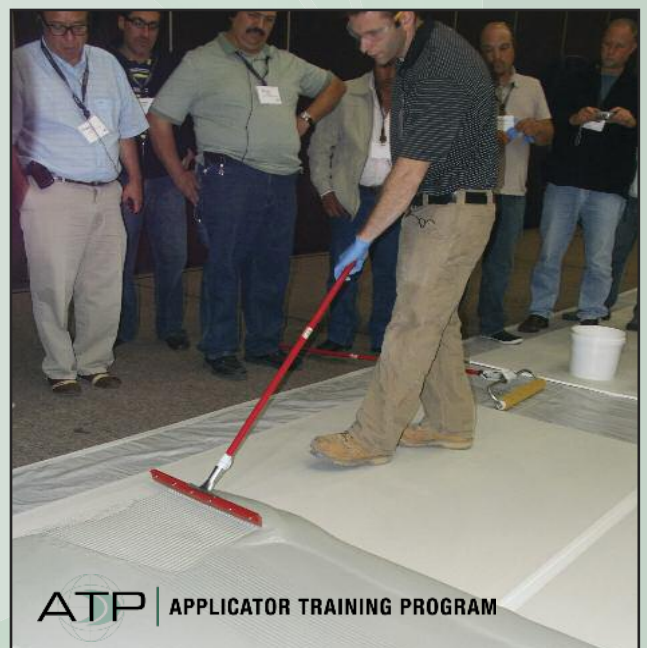

Contact Dur-A-Flex today!







**DUR-A-FLEX**  
INNOVATION FROM THE FLOOR UP

**860-528-9838**  
**contact\_us@dur-a-flex.com**

## Floor and Wall Systems

Dur-A-Flex systems allow quick installation, are easy to clean and offer high impact, wear and chemical resistance. In addition, Dur-A-Flex systems comply with environmental and other applicable regulations, such as CA 01350, for safety and hygienic environments.

### Systems






|                                | Dur-A-Flex (Epoxy)  | Poly-Crete (Urethane)   | Hybri-Flex (Hybrid)  | Fast Curing  |                                       |
|--------------------------------|---|---|--|--|---------------------------------------|
|                                |    |    |    |   |                                       |
| <b>Description</b>             | Epoxy-based systems recommended for industrial and decorative applications. Withstands chemical spills, heavy equipment, continuous traffic and humid environments. | Urethane-based systems recommended for food processing areas and/or areas exposed to chemical attack, impact, high temperatures and thermal shocks. | High performance floors that combine the properties of more than one Dur-A-Flex system. They provide an attractive decorative finish, while resisting high levels of moisture in the concrete. | Systems with ultra fast curing are ideal for operational areas that cannot afford downtimes. Perfect for outdoor areas (UV resistance) and cold rooms (low temp cure). |                                       |
| <b>Appearance</b>              | Decorative and/or Industrial  | Industrial  | Decorative and/or Industrial   | <b>Cryl-A-Flex (MMA)</b><br>Dec. &/or Indust.  | <b>Accelera®</b><br>Dec. &/or Indust. |
| <b>Cure Time @ 70°F (21°C)</b> | 8 - 14 hours  | 8 - 14 hours  | 8 - 14 hours   | 45 - 60 min.   | 2 hours                               |
| <b>Restart Operations</b>      | 3 - 5 days  | 1 - 3 days  | 3 days   | 1 day  | 1 - 2 days                            |
| <b>Temp. Installation</b>      | 60°F - 90°F<br>(15°C - 32°C)  | 60°F - 85°F<br>(15°C - 29°C)  | 60°F - 85°F<br>(15°C - 29°C)   | 0°F - 90°F<br>(-17°C - 32°C)   | 60°F - 85°F<br>(15°C - 29°C)          |
| <b>Heat Tolerance</b>          | Medium  | High  | Medium   | Medium   | Medium                                |
| <b>UV Resistance</b>           | No (Use UV Res. Topcoat)  | No (Use UV Res. Topcoat)  | Excellent  | Excellent  | Excellent                             |
| <b>Thickness (nominal)</b>     | 20 mils - 1/4" (0.5 - 6 mm)   | 1/8" - 1/4" (3 - 6 mm)  | 3/16" - 1/4" (4 - 6 mm)  | 1/16" - 1/4"<br>(1.6 - 6 mm)   | 1/8" - 1/4"<br>(3 - 6 mm)             |

• For more information, refer to product data sheets currently on [www.dur-a-flex.com](http://www.dur-a-flex.com).



CA 01350  
COMPLIANT







### Floor Finish

|            |   |
|------------|---|
| Solid      |  |
| Chip       |  |
| Quartz     |  |
| Mica       |  |
| ReFLEXions |  |

### Colors



### Floor Textures

|             | With Aggregate  | Without Aggregate   |
|-------------|---|---|
| Smooth      |  |  |
| Orange Peel |  |  |
| Standard    |  |  |

Visit [www.dur-a-flex.com](http://www.dur-a-flex.com)



#### Literature

- Color Charts
- Product Data Sheets
- Case Studies

#### Training

- Installer Training Request Form
- Training Videos
- Application Guide by Market Segment

Distribution Centers

#### Locations

- East Hartford, Connecticut
- Ontario, California
- Chicago, Illinois

### Call an area representative

For technical questions and detailed specification of an appropriate system, consult a representative.

